

## Radiant Heat Series VENTED GAS LOGS



- 3 times more heat than a standard log set
- Beautiful, warm glow in the center of the log stack
- Each style available in 21", 24", 30" and 36"

Timbers Series Radiant Heat logs redefine the role of a vented gas log set. Our revolutionary molding process captures all the detail you expect from Hargrove in ceramic fiber, for maximum beat radiance. Our Radiant Riser technology directs this beat forward and into the room, creating radiant beat output comparable to vent free, with the natural beauty of vented logs. Cross Timbers was awarded the prestigions Vesta award for Gas logs at the 2007 HPBExpo and we have continued to enhance the line with the addition of the Rustic Timbers and Woodland Timbers.

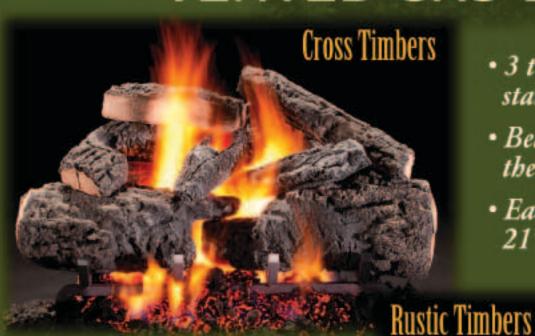

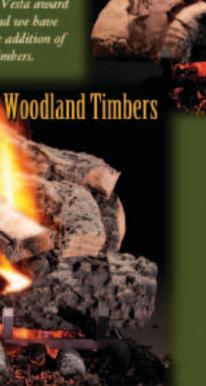


## How We Maximize Radiant Heat

- Ceramic Fiber Logs The properties of our Timbers Series ceramic fiber logs are different than refractory or concrete
  logs. Refractory logs radiate some heat, but mostly absorb the heat into the hody of the log. Our Timbers Series ceramic
  fiber logs push or radiate heat off of the heated surface of the log into the living space thus taking full advantage of the heat
  heing produced by the flame.
- H-Burner To help achieve the most radiant heat it is important to heat more surface area on the logs. Although all of
  our hurner systems work fine with the Timbers Series, our H-Burner produces the largest hody of flame thus maximizing
  the radiant heat output.
- Radiant Riser (included with all Timbers series logs) This U-Shaped log piece helps by creating a heat chamber in the middle of the log stack.
- Radiant Glow Bracket (included with all Timbers series logs) A piece that attaches to the back of the H-Burner which
  bridges the gap between the back wall of the burner and the Radiant Riser. The barrier created directs the flame and heat
  to the heat chamber thus maximizing the radiant heat production.



- A BACK LOG
- **B** RADIANT RISER
- C RADIANT GLOW BRACKET
- D H-BURNER

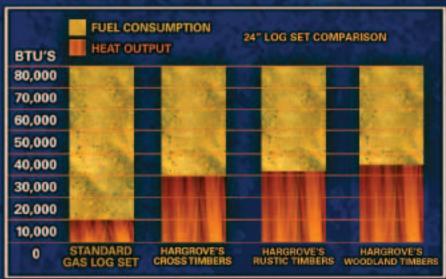

24" Timbers Series sets produce up to 35,000 BTU's of effective radiant beat. Typical 24" refractory or concrete logs produce approximately 10,000 to 12,000 BTU's of effective radiant beat.

Hargrove Manufacturing Corp. 207 Wellston Park Rd., Sand Springs, OK 74063 (800) 725-4166 For more info, visit our website at www.hargrovegaslogs.com

