





VALOR VENTANA SPECIAL FEATURES

An impressive 60% turndown helps match the flame's intensity to your home comfort needs.

Recessed glass reduces reflection and eliminates the "aquarium effect" that you get with other gas fireplaces.

Smaller venting and tapered sides allow for installation in tight corners and limited spaces.

The Ventana is a fully functional heater that doesn't rely on electricity or a fan for heat.

Optional screen fronts not only add another design element and realism to your fire, they also provide added safety for young children.

VALORSTAT PLUS REMOTE CONTROL STANDARD WITH PURCHASE



The **ValorStat Plus** Remote Control gives you the power to select, adjust and program the desired temperature that you want. Timer and Thermostat mode help save energy and lower your home heating costs.

Pilot On Demand: The ValorStat Plus also has the ability to turn your pilot light **ON** and **OFF** from the programmable handheld remote.

FIREBOX LIGHTING

An adjustable lighting system is included with all Ventana units. Firebox lighting enhances the ambience in the room even when the fire is off.

VALOR WALL SWITCH KIT (OPTIONAL)



Light the pilot, then simply adjust the flame to your desired comfort level - all from one standard size switch. Lighting the pilot has never been so easy! The wall switch works in conjunction with the ValorStat Plus hanheld remote.

MULTI-ZONE HEAT MANAGEMENT REMOTE BLOWER KIT (OPTIONAL)

The 1270 Remote Blower Kit redistributes heat generated by the Ventana to other areas of your home. Maximize comfort levels by efficiently heating up to three seperate living spaces, all from one fireplace! (View the spec page for more info.)

To learn more visit valorfireplaces.com





• FINISHING OPTIONS

Designed to expand fireplace presence, the Bronze Square Trim Kit provides a clean, flat edge for finishing. There are several other trims and surrounds available in a wide collection of high quality finishes.

(See double page product spread).

CLEAN & SIMPLE

Available in both 3 and 4-sided designs, the Ventana backing plate trims provide a straight, clean surface for tile, rock, concrete or drywall.

MODERN APPEAL

Available in both 3 and 4-sided trim kits, the Metropolis provides the ultimate in clean, continuous design. Accessorize your brushed nickel trim with our matching Metropolis Andiron

(see double page product spread for more brushed nickel options).

TRADITIONAL REALISM

For those who seek the look and feel of a traditional wood burning fireplace, the Ventana Draw Screen Kit adds defining lines that accentuate realistic, glowing flames within.





Valor VENTANA SERIES

VENTANA FIREPLACE COMPONENTS

ENG	1200EAN	Direct Vent Ventana Engine NG (Log Set)				
臣	1200EAP	Direct Vent Ventana Engine LPG (Log Set)				
	1245VRL	Victorian Red Brick Liner				
LINERS	1250FSL	Frontera Stone Liner				
	1255IBL	Inca Slab Liner				
	1260BSL	Black Slab Liner				
	1280LSL	Ledgestone Liner				
	1205DSK	Draw Screen Kit				
	1215FDV	Double Door FenderFire Front (31-3/4"h X 35-3/4"w)				
FRONTS	1220FSV	Single Door FenderFire Front (31-3/4"h X 35-3/4"w)				
	1240BPK	3-Sided Backing Plate Kit - Black (31-3/4"h X 35-3/4"w)				
	1241FBK	4-Sided Backing Plate Kit - Black (31-3/4"h X 35-3/4"w)				
	1235MTP	3-Sided Trim Kit - Brushed Nickel (31-3/4"h X 35-3/4"w)				
	1237MFP	4-Sided Trim Kit - Brushed Nickel (31-3/4"h X 35-3/4"w)				
	623STV	Square Trim Kit - Vintage Iron (34 7/16"h X 44 5/16"w)				
S	623STZ	Square Trim Kit - Bronze (34 7/16"h X 44 5/16"w)				
SURROUNDS	(The 623 Squ	The 623 Square Trim Kits must be installed with the 1240BPK 3-Sided Backing Plate)				
00	614CVI	Arched Cast Surround - Vintage Iron (35-3/4"h X 43-5/8"w)				
RR.	615CVI	Cast Surround - Vintage Iron (35-3/4"h X 45-1/4"w)				
[NS	(The 614/615 Surrounds must be installed with one of these fronts - 1215FDV, 1220FSV, 1240BPK)					
IS	1225VFB	Ventana Fret - Black				
FRETS	1230ACB	Andiron Classic - Black				
Œ	1236MAP	Metropolis Andiron - Brushed Nickel				
	1265WSK	Wall Switch Kit				
Ĭ	1200NCK	NG Conversion Kit				
\ \frac{1}{\times}	1200PCK	LPG Conversion Kit				
OPT. KITS	1270RBK	Remote Blower Kit				
	GV60PAK	GV60 Power Adapter Kit				

CONSUMER AWARENESS - Engineered to provide radiant heat for your home, fireplace surfaces (in particular the glass window) will get hot during operation. Objects should be kept a safe distance away from the fireplace at all times. Never allow children to touch the glass. Adult supervision is required. We recommend using safety screen if you have children in the home. For additional hearth safety information visit - www.valorfireplaces.com/safety (&) www.hpba.org.

ABOUT OUR EFFICIENCY RATINGS - All Valor product literature is published using recognized Canadian and US government test methods for determining energy efficiency performance. This ensures our products will perform in your home as rated. Beware of misleading "steady state" efficiency claims made by manufacturers using their own "in-house" test methods. Examples include alterations to venting and installation restrictions which in turn produce false ratings. For more information please visit our website at www.valorfireplaces.com.

INTERIOR LINERS



Victorian Red Brick Liner



Frontera Stone Liner



Inca Slab Liner



Black Slab Liner




Ledgestone Liner


INTERIOR LINERS

Roof Termination Side Wall Termination For complete venting capabilities and specifications, contact your local Valor dealer.


PLEASE NOTE: The maximum vertical vent run on a Valor Ventana engine is 40 feet in total. The minimum is 2 feet.

MINIMUM FRAMING DIMENSIONS

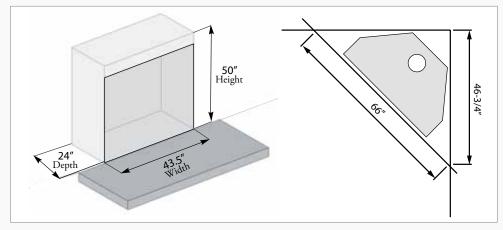




1270RBK REMOTE BLOWER KIT



- \bullet Blower assembly must be installed on interior walls or ceiling only
- Installation of this kit must be performed by a qualified technician
- A maximum of two kits may be installed on the Ventana heater


INIMUM FRAMING DIMENSIONS

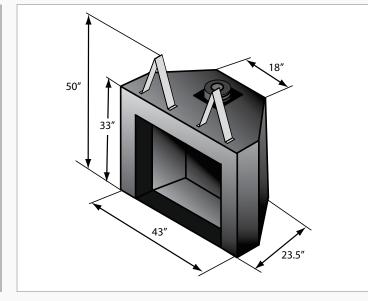

MODEL/FUEL

Model	Fuel	Max. Input BTU/hr	Min. Input BTU/hr	EnerGuide P4 Rating**	A.F.U.E.**	Max. Output (w/out fan) BTU/hr **
1200EAN	NG	36,000	15,000	64.4%	68.0%	25,530
1200EAP	LPG	31,000	15,000	64.1%	67.5%	21,510

^{**} Ratings and Outputs have been determined without a fan/blower, using the CSA P.4.1-02 test method













All product information is accurate at time of printing and is subject to change. Note: Printed images may vary from actual product.

